

S 6.0 x L



The application specific fastener for secret fix of Meteor and Athlon panels.

Features of the screw S:


- ▲ Minimised radial stress due to low thread flank angle and cutting edge
- ▲ High tensile strength
- ▲ High torsion strength
- ▲ Known performance figures
- ▲ A4 stainless steel
- ▲ Secure Torx 30 Drive

The cutting edge

The screw S is made with a thread form and has an additional feature of a milled cutting edge over approximately three pitches at the lead thread end of the screw.

Benefits of screw:

- ▲ Secret fix
- ▲ Excellent performance
- ▲ Mechanical reliability
- ▲ Simple installation
- ▲ Fast and efficient
- ▲ Works in varied conditions
- ▲ Elimination of thread inserts
- ▲ Allows access to structure.



Bracket secret fix for High Pressure Laminates



Dedicated drill bits to accurately drill stopped holes to the required depth and hole diameter in the high pressure laminate boards to receive the EJOT PTS fasteners to securely install hanging brackets

Application Guide.

8mm thick board

PT® S 60 x 9.5 (SAP 4510116330)

5.5mm deep hole PTS 4.9 x 5.5 stop drill

10mm thick board


PT® S 60 x 11.5 (SAP 4510117330)

7.5mm deep hole PTS 4.9 x 7.5 stop drill

13mm thick board

PT® S 60 x 14.5 (SAP 4510118330)

10.5mm deep hole PTS 4.9 x 10.5 stop drill

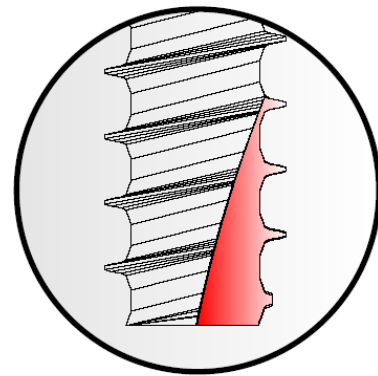

Torx 30 Drive